

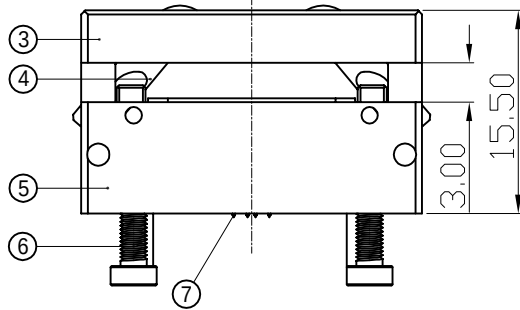

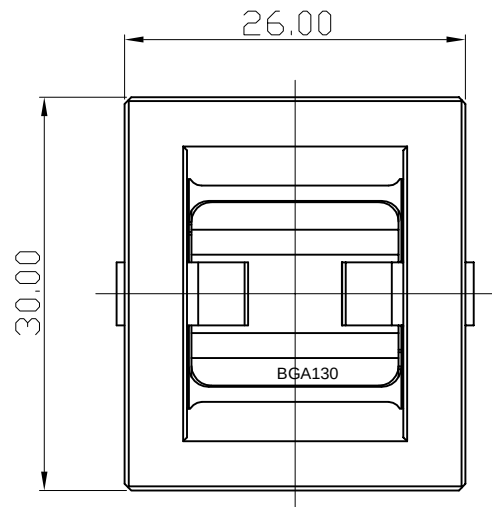


	10	11	12
REVISION	DESCRIPTION	CHECK	DATE
1			
2			
3			

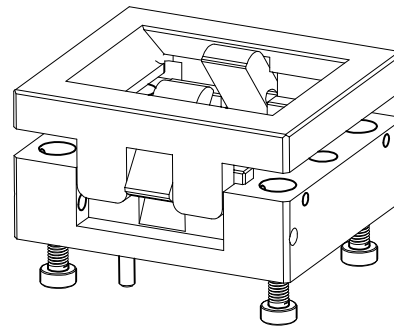


PERFORMANCE


1. Insulation Resistance: 1000MΩ Min.At DC 500V
2. Dielectric Withstanding Voltage For 1 Minute At AC 700V
3. Contact Resistance 30MΩ MAX.at 10mA and 20mV MAX.(Initial)
4. Current Rating: 1A max.
5. Operation Temperature 0°C ~+120°C
6. Pogopin and locating piece can be replaced!

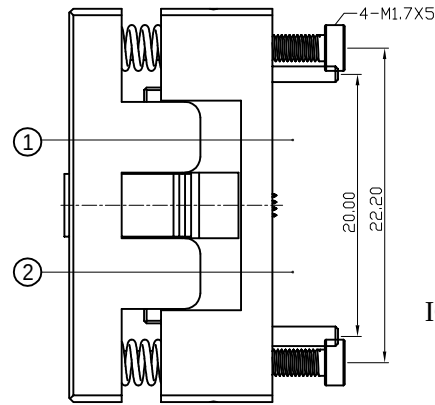

IC and Socket have
the same center

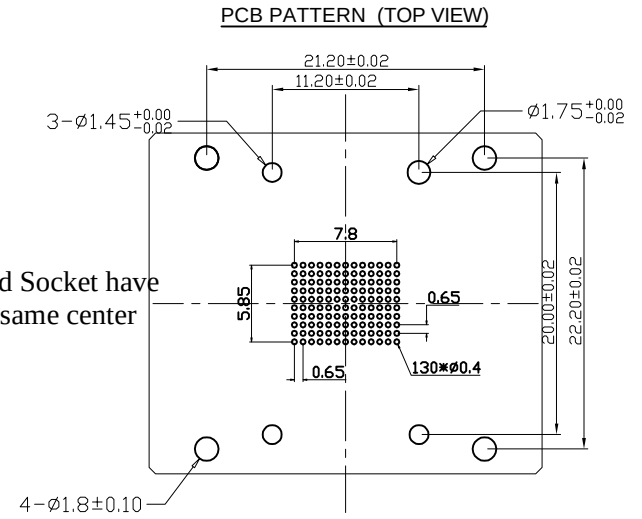

APPLICABLE IC

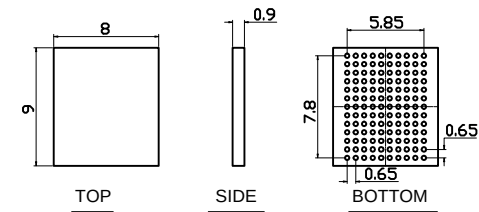

7	04-A-1733	POGO PIN	BeCu	3t	Au PLATING
6	06-B-2570	SCREW	STAINLESS	4	M2X5.5L
5	210-048-E105D	BASE	AL6061	1	BEIGE
4	210-048-S105D	IC HOLDER	AL6061	2	BEIGE
3	210-048-D105D	COVER	AL6061	1	
2	09-B-4005	DOWEL PIN	STAINLESS	1	Ø1.7X5.0L
1	09-B-4003	DOWEL PIN	STAINLESS	3	Ø1.4X5.0L
No	Part Number	Name	Material	Q/ty	Note

PROJECTION		GENERAL TOLERANCES	±0.10	TITLE	BGA130 SOCKET
DIMENSION:	mm	SCALE:	1:1	CLASS	OPEN TOP SOCKET
APP:		DATE:		DRW.NO	007-1130C-34625
CHECK:		DATE:			
DESK:	ENG08	DATE:	20141006		

KZT
KaiZhiTong Micro Electronic L.,ltd
<http://www.icsocket.net> www.kzt.cc