



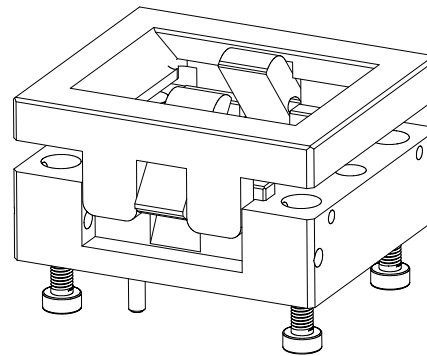
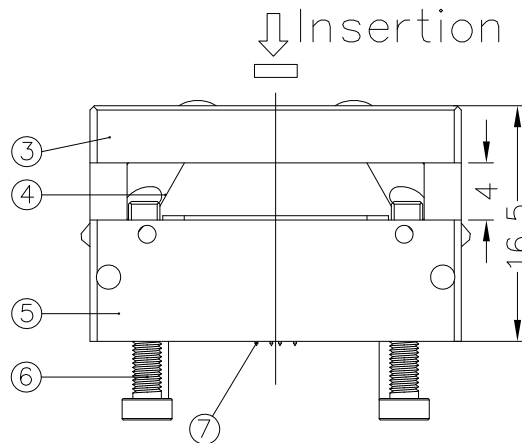
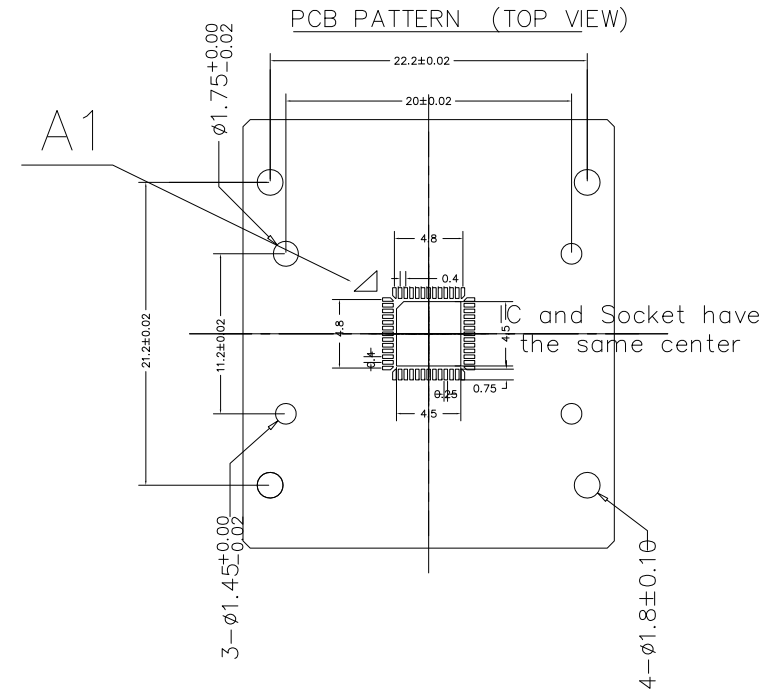
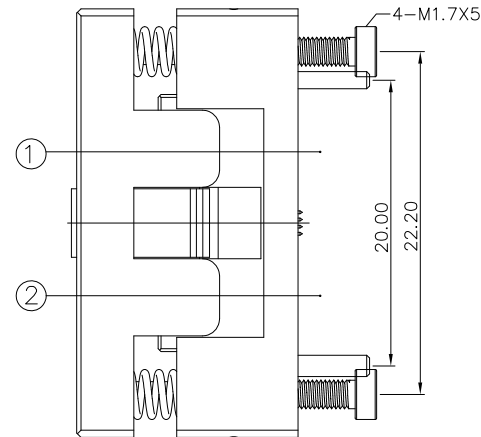



	REVISION	DESCRIPTION	CHECK	DATE	REV.NOTICE.NO
△1					
△2					
△3					

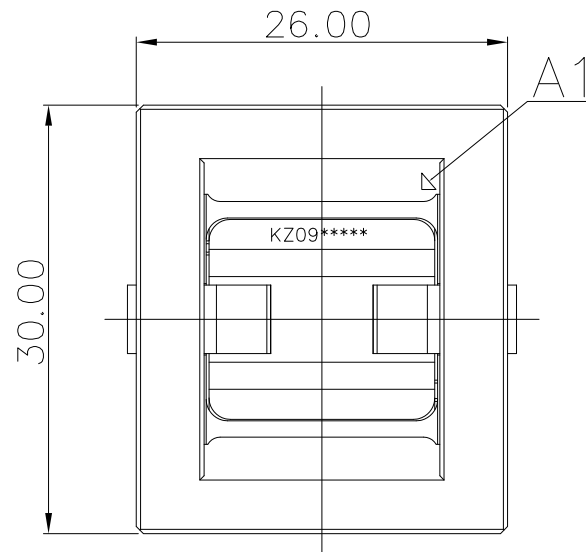

PERFORMANCE

- 1 Insulation Resistance: 1000 M Ω Min At DC 500V
- 2 Dielectric Withstanding Voltage For 1 Minute At AC 700V
- 3 Contact Resistance 30 m Ω MAX at 10mA and 20mV MAX. (Initial)
- 4 Current Rating: 1A max.
- 5 Operation Temperature 0° C ~+120° C
- 6, Pogopin and locating piece can be replaced

7	04-A-1733	POGO PIN	BeCu	52	Au PLATING
6	06-B-2570	SCREW	STAINLESS	4	M2X.5L
5	210-048-E1050	BASE	AL6061	1	BEIGE
4	210-048-S1050	IC HOLDER	AL6061	2	BEIGE
3	210-048-01050	COVER	AL6061	1	
2	09-B-4005	DOWEL PIN	STAINLESS	1	Ø 1.7X5.0L
1	09-B-4003	DOWEL PIN	STAINLESS	3	Ø 1.4X5.0L
No	Part Number	Name	Material	Q'ty	Note

PROJECTION		GENERAL TOLERANCES	ISO	TITLE	QFN0052-0.4 6X6
		R E V	A	CLASS	QFN0052-0.400-TA01PML
DIMENSION	mm	SCALE	1:1	DRW.NO	0918008
APP		DATE		 KaiZhiTong Micro Electronic L.td http://www.icsocket.net www.kzt.cc	
CHECK		DATE			
DECK	ENG04 LYC	DATE	20181220		