	REVISION DESCRIPTION	CHECK	APP	DATE	REV.NOTICE.NO
△1					
△2					
△3					

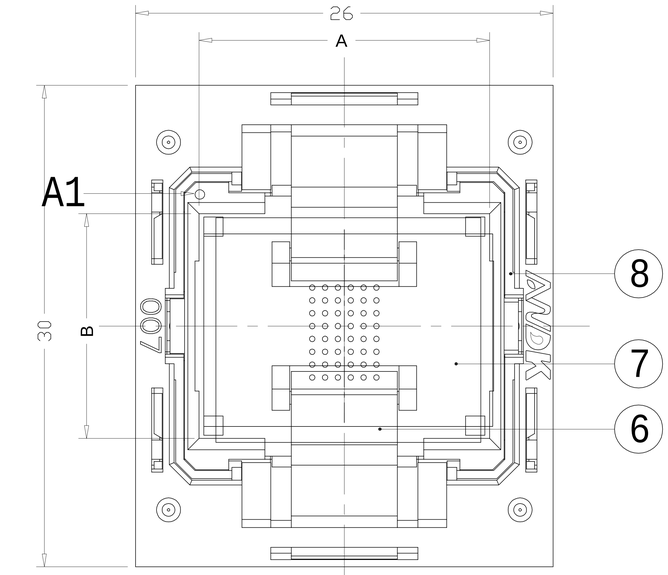

IC Loading Direction
(Center In)

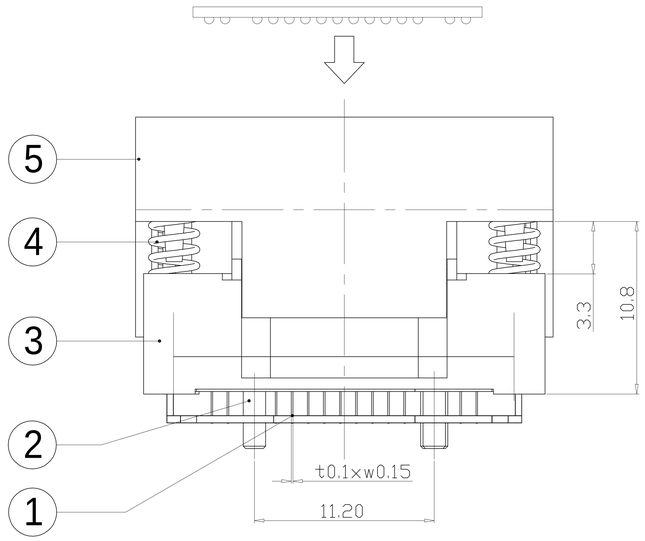

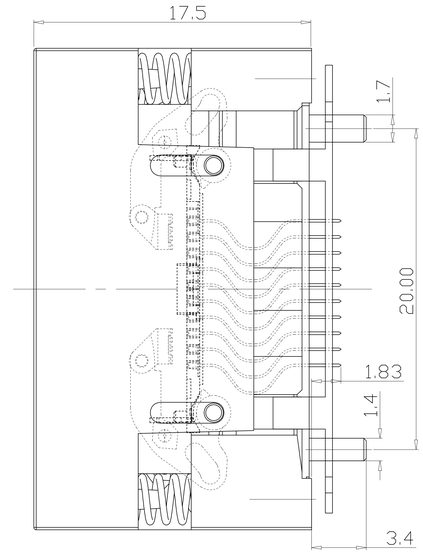

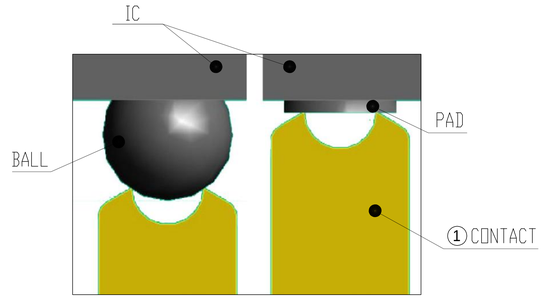

CONTAC TIP DETAIL

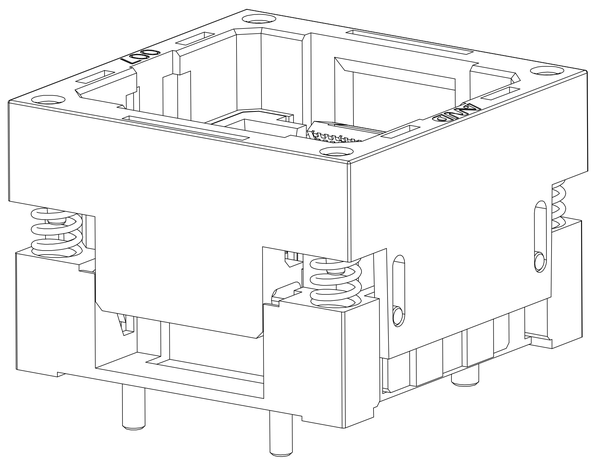

PCB Pattern(TOP View)

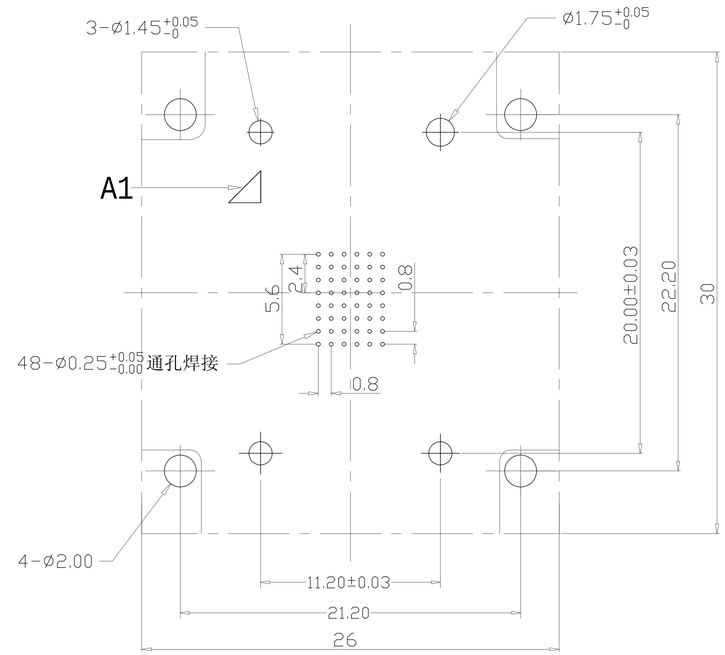

Applicable IC

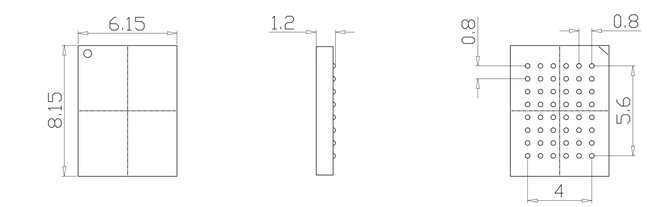

TOP VIEW SIDE VIEW BOTTOM VIEW

PERFORMANCE

1、Insulation Resistance: 1000MΩ Min.At DC 500V
2、Dielectric Withstanding Voltage For 1 Minute At AC 700V
3、Contact Resistance 30mΩ MAX。at 10mA and 20mV MAX.(Initial)
4、Current Rating: 1A max.
5、Operation Temperature -65°C ~+175°C
6、Life Span 25,000 Times (Mechanical)
7、Testing chips with balls of different size or superficial oxidation,even if no ball

No	Part Number	Name	Material	Q/ty	Note
8	310-048-D105D	IC GUIDE	PEI/PES	2	BLACK
7	310-048-C105D	SLIDER	PEI/PES	1	BLACK
6	310-048-C105D	IC HOLDER	PEI/PES	2	BLACK
5	310-048-B105D	COVER	PEI/PES	1	BLACK
4	20-B-4505B	SPRING	SUS	4	FOR COVER
3	310-048-A105D	BASE	PEI/PES	1	BLACK
2	310-048-F105D	LOCATOR	PEI/PES	3	BLACK
1	04-A-1705	CONTACT	BeCu	48	Au PLATING

TOLERANCE	PROJECTION		GENERAL TOLERANCES	±0.10	TITLE: BGA48-0.8 SOCKET
			R E V	A	CLASS: BGA48-0.8-TP20NT
X. ±0.50	DIMENSION: mm		SCALE:	1:1	DRW.NO: 007-BGA-0.8-48-6.15X8.15-B
X.X ±0.25	APP:		DATE:		ANDK
X.XX ±0.10	CHECK:		DATE:		
X.XXX ±0.05	DEGK: ENG03		DATE: 20160311		